

Swing-Arm Semi Automatic ☒ CE approved

Tyre Changer


Durable | Space Saving | High Quality (Ideal for Small Tyre Repair Shop)

- ☒ Foot valve fine structure can be removed as a whole. High stability & reliability ; Easy maintenance.
- ☒ Special steel mount & demount head. Super hardness, reduce friction & rust-proof.
- ☒ Grip jaw adopted U.S.8640 alloy steel, high strength, wear resistant & anti-rust

AA-TC-185

Technical Parameters

Motor power	1.1kw
Power supply	240v 1PH
Operation pressure	8-10 bar
Max. wheel dia	38" (960 mm)
Max. wheel width	11" (280 mm)
Rim clamping from outside	10"-18"
Rim clamping from inside	12"-21"
Bead-breaker force	2500 kg
Noise	<70 dB

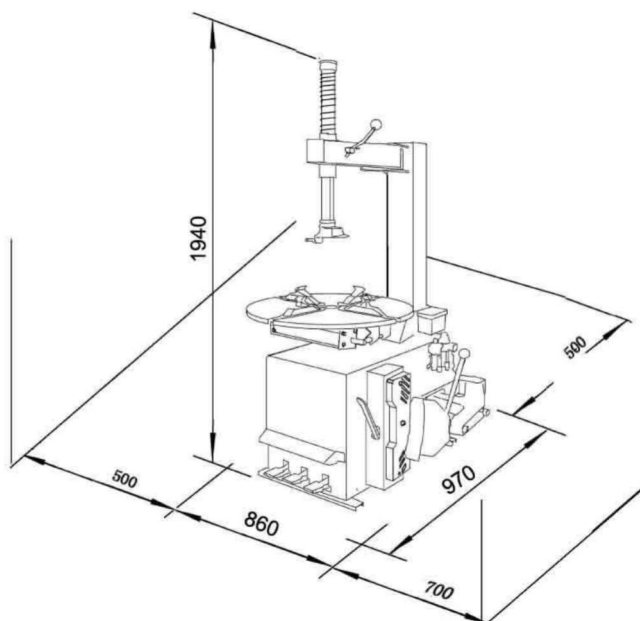

**MOTOREX
HOIST**

Since 2005



**TRUSTED
VEHICLE LIFT
SOLUTION
PROVIDER**
[SALES |
INSTALLATION |
PARTS & SERVICE]

**READY
STOCK**



**NATIONWIDE
DELIVERY**

**NZ
OWNED**
Since 2005

 **motorexhoist**

www.motorexhoist.com